

Megmeet MC 280

人机默认值



通讯速率：9600, 7, Even, 1
控制器站号：1
控制区/状态区：D0 / D10

控制器接线的说明

a. RS-232（DOP-A/AE/AS, DOP-B 系列适用）

DOP 接线端		Controller 接线端
9 pin D-sub male (RS-232)		8 pin Mini DIN male (RS-232)
RXD (2)	—————	(5) TXD
TXD (3)	—————	(4) RXD
GND (5)	—————	(8) GND


b. RS-485（DOP-A/AE 系列适用）

DOP 接线端		Controller 接线端
9 pin D-sub male (RS-485)		RS-485 接线端子
D+ (2)		D+
D+ (3)		
D- (1)		D-
D- (4)		


c. RS-485（DOP-AS57 系列适用）

DOP 接线端		Controller 接线端
9 pin D-sub male (RS-485)		RS-485 接线端子
R+	—————	D+
R-	—————	D-

d. RS-485（DOP-AS35/AS38 系列适用）

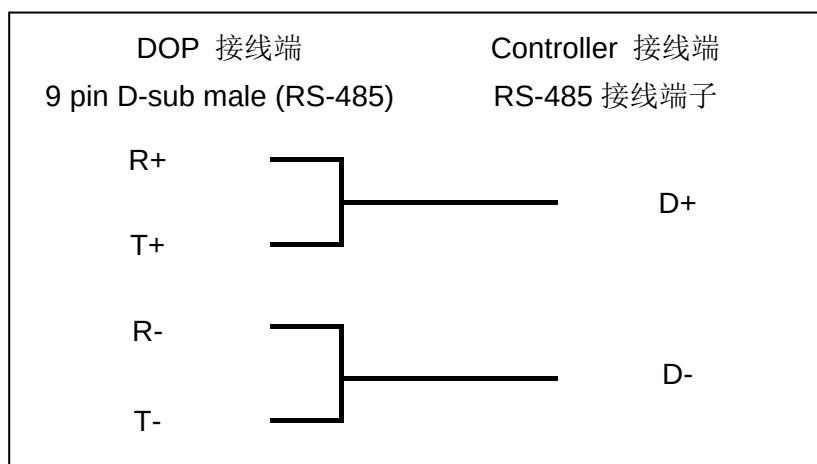

e. RS-485（DOP-B 系列适用）

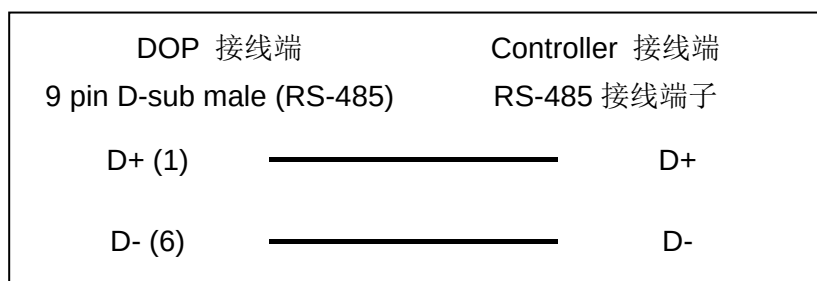

控制器 Read/Write 地址的定义

a. 寄存器

寄存器种类	符号格式	读写地址范围	数据长度	注
	Word No.(n)			
D_Register	Dn	D0 – D7999	Word	
SD_Register	SDn	SD0 – SD511	Word	
Z_Register	Zn	Z0 – Z15	Word	
T_Register	Tn	T0 – T511	Word	
C_Register	Cn	C0 – C199	Word	
R_Register	Rn	R0 – R32767	Word	
HC_Register	HCn	HC200 – HC306	Double Word	

b. 接点

接点种类	符号格式	读写地址范围	注
	Bits No.(b)		
X_Coil	Xb	X0 – X377	8 进位

Y_Coil	Yb	Y0 – Y377	8 进位
M_Coil	Mb	M0 – M10239	
SM_Coil	SMb	SM0 – SM511	
S_Coil	Sb	S0 – S4095	
T_Coil	Tb	T0 – T511	
C_Coil	Cb	C0 – C306	

